

# Unibar




## BCS340/341/342



BCS342

## 悠奕系列Unibar LED线性洗墙灯具

Unibar系列是款表面安装，室外应用等级和超薄尺寸的线性LED直观照明灯具，专为立面和室外建筑照明应用而设计。坚固的机械设计和独特的光学设计使其非常适合建筑立面，媒体立面，桥梁，立交桥以及任何需要纤薄线性直射照明解决方案的应用。包含白光，单色光，RGB，RGBW和可调白光。直视扩展镜头，通过用于端到端连接的布线和多达10个像素（10ID）的DMX控制选项提供，使建筑师和设计师可以自由探索各种概念和设计，而不受限制。

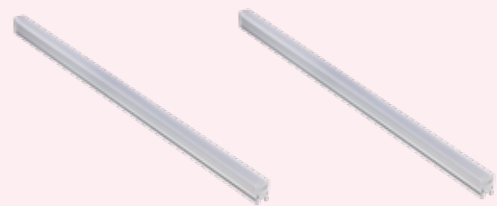

BCS340

BCS341

### 产品特点

- 低功率LED提供平滑柔和的光照分布
- 标准：RGBW，RGB，2700K，3000K和4000K
- 可选5000K，单色和可调白光
- 标准300、500和1000mm产品长度
- 多达10个像素（10ID），可轻松灵活地进行控制
- 宽光束角，适用于直视照明应用
- 坚固的设计和IP66防护等级，可在户外使用
- 可用DMX进行控制

联系人：王建良  
联系电话：131 0209 6511  
企业网址：[www.bokinglighting.com](http://www.bokinglighting.com)

### 主要应用

- 适合应用于建筑立面和建筑细节等



### 技术参数


产品系列	BCS340			BCS341			BCS342		
尺寸 (L x W x H)	300/500/1000 x 22x 45 mm (不带支架)			300/500/1000 x 30 x 45 mm (不带支架)			300/500/1000 x 55 x 55.4mm (不带支架)		
	300/500/1000 x 28 x 65 mm (带夹式支架)			300/500/1000 x 35.5 x 65 mm (带夹式支架)			300/500/1000 x 57.2 x 60mm (带夹式支架)		
光源	低功率LED								
光通维持率	White: 50,000 小时 L70B50 at 35°C; RGB: 50,000 小时 ,L50B50 @ 35°C								
外壳	挤压铝								
表面	阳极氧化								
外壳颜色	银色								
标品支架种类	表面安装支架								
标品支架材料	挤压铝								
调节	固定，不可调节								
透镜	抗老化和抗紫外线，高光学效率的PC光学盖								
垫片	硅胶								
控制接口	On/Off ; DMX512								
输入电压	24V DC								
最大电流	6A								
IEC等级	Class III								
电源线(On/Off)	2端扁平电缆，2x1.0mm <sup>2</sup> ，带连接器								
电源/信号电缆(DMX)	5端扁平电缆，2x1.0mm <sup>2</sup> +3x0.3mm <sup>2</sup> ，带连接器								
电缆长度	输入 = 15cm, 输出 = 15cm								
连接器	IP67公/母连接器，用于直通电源+信号连接								
长度	300mm	500mm	1000mm	300mm	500mm	1000mm	300mm	500mm	1000mm
LED数量	12	24	48	18	30	60	36	60	120
功率	3W	6W	12W	4W	7.5W	15W	7.5W	12W	24W
标准像素数(IDs)	2	4	8	3	5	10	3	5	10
重量	0.4kg	0.5kg	0.8kg	0.45kg	0.55kg	0.9kg	0.39kg	0.65kg	1.3kg
标准色温/颜色	2700K, 3000K, 4000K, RGB, RGBW								
标准光束角(HxV)	115x145°								
标品白光CRI	80								
白光 SDCM	4								
颜色波长范围	R: 620 - 625nm; G 525 - 530nm; B: 470 - 475nm								

## 技术参数

产品系列	BCS340	BCS341	BCS342
温度范围		-40°C to 50°C (运行) -35°C to 50°C (启动) -40°C to 70°C (存储)	
防护等级		IP66, IK08	
证书		CE, CB, CQC	
质保		3年	
定制化	自定义长度最大为L120 更高的功率 (高达15W / m) 表面安装滑入式支架 RDM控制 (报告灯具地址和状态) 对于某些配置, 像素数量更多 (最高16PX / 米)	自定义长度最大为L120 表面安装滑入式支架 RDM控制 (报告灯具地址和状态) 对于某些配置, 像素数量更多 (最高16PX / 米)	定制长度最大为L120 RDM控制 (报告灯具地址和状态) 对于某些配置, 像素数量更多 (最高20PX / 米)


## 尺寸图

单位: mm

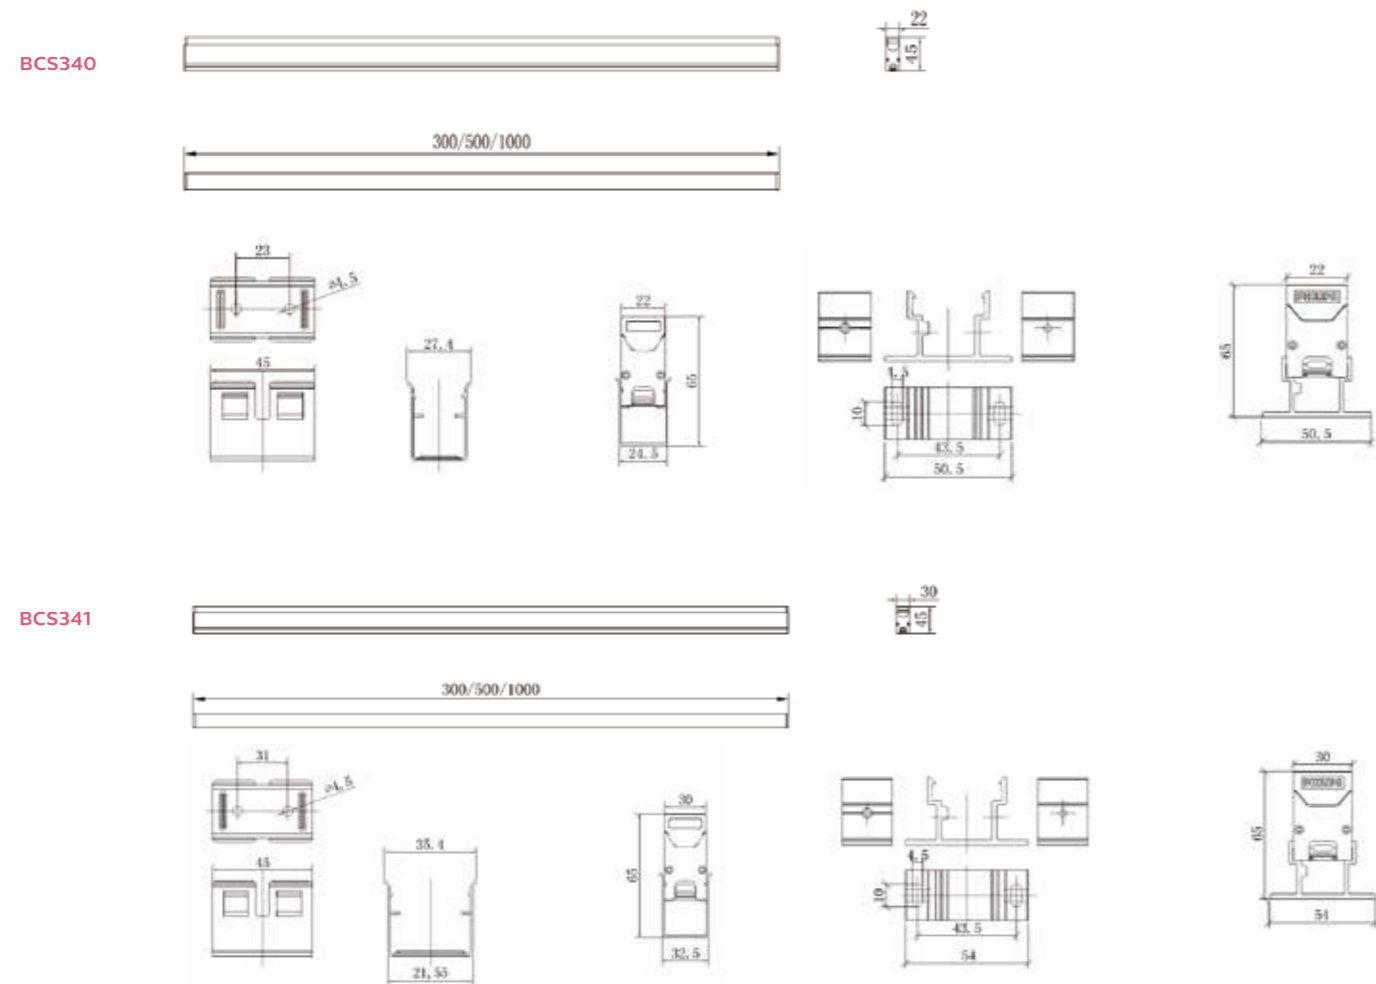

## 尺寸图

单位: mm

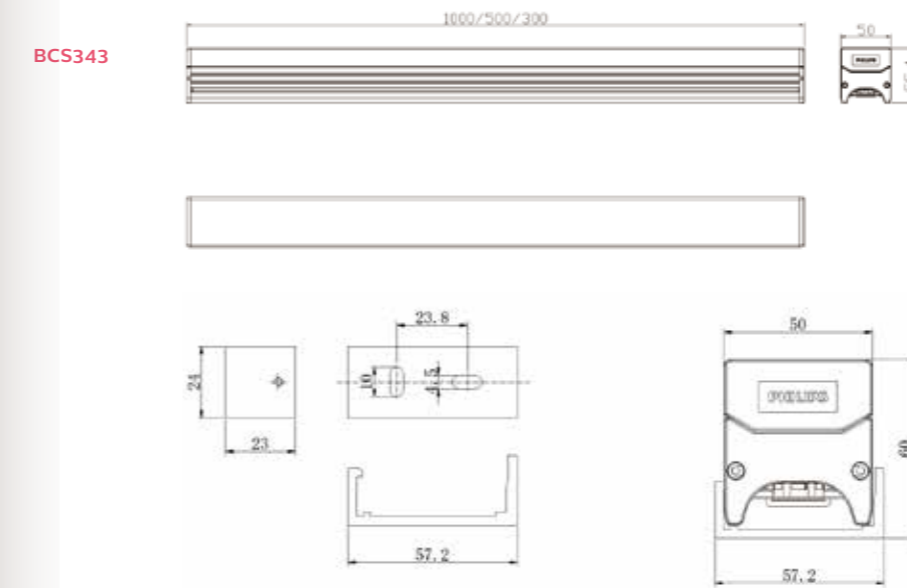

## 订购信息

产品型号	功率(W)	12NC
BCS340 48LED 27K 24V OC L100 8PX	12	911401778832
BCS340 48LED 27K 24V OC L100	12	911401778842
BCS340 48LED 30K 24V OC L100 8PX	12	911401778852
BCS340 48LED 30K 24V OC L100	12	911401778862
BCS340 48LED 40K 24V OC L100 8PX	12	911401778872
BCS340 48LED 40K 24V OC L100	12	911401778882
BCS340 48LED RGB 24V OC L100 8PX	12	911401778892
BCS340 96LED RGBWW 24V OC L100 8PX	12	911401778902
BCS340 96LED RGBNW 24V OC L100 8PX	12	911401778912
BCS340 24LED 27K 24V OC L50 4PX	6	911401778922
BCS340 24LED 27K 24V OC L50	6	911401778932
BCS340 24LED 30K 24V OC L50 4PX	6	911401778942
BCS340 24LED 30K 24V OC L50	6	911401778952
BCS340 24LED 40K 24V OC L50 4PX	6	911401778962
BCS340 24LED 40K 24V OC L50	6	911401778972
BCS340 24LED RGB 24V OC L50 4PX	6	911401778982
BCS340 48LED RGBWW 24V OC L50 4PX	6	911401778992
BCS340 48LED RGBNW 24V OC L50 4PX	6	911401779002
BCS340 12LED 27K 24V OC L30 2PX	3	911401779012
BCS340 12LED 27K 24V OC L30	3	911401779022
BCS340 12LED 30K 24V OC L30 2PX	3	911401779032
BCS340 12LED 30K 24V OC L30	3	911401779042
BCS340 12LED 40K 24V OC L30 2PX	3	911401779052
BCS340 12LED 40K 24V OC L30	3	911401779062
BCS340 12LED RGB 24V OC L30 2PX	3	911401779072
BCS340 24LED RGBWW 24V OC L30 2PX	3	911401779082
BCS340 24LED RGBNW 24V OC L30 2PX	3	911401779092

联系人: 王建良  
 联系电话: 131 0209 6511  
 企业网址: [www.bokinglighting.com](http://www.bokinglighting.com)

## 订购信息

产品型号	功率(W)	12NC
BCS341 18LED 27K 24V OC L30 3PX	4	911401779282
BCS341 18LED 27K 24V OC L30	4	911401779292
BCS341 18LED 30K 24V OC L30 3PX	4	911401779302
BCS341 18LED 30K 24V OC L30	4	911401779312
BCS341 18LED 40K 24V OC L30 3PX	4	911401779322
BCS341 18LED 40K 24V OC L30	4	911401779332
BCS341 18LED RGB 24V OC L30 3PX	4	911401779342
BCS341 36LED RGBWW 24V OC L30 3PX	4	911401779352
BCS341 36LED RGBNW 24V OC L30 3PX	4	911401779362
BCS341 30LED 27K 24V OC L50 5PX	7.5	911401779192
BCS341 30LED 27K 24V OC L50	7.5	911401779202
BCS341 30LED 30K 24V OC L50 5PX	7.5	911401779212
BCS341 30LED 30K 24V OC L50	7.5	911401779222
BCS341 30LED 40K 24V OC L50 5PX	7.5	911401779232
BCS341 30LED 40K 24V OC L50	7.5	911401779242
BCS341 30LED RGB 24V OC L50 5PX	7.5	911401779252
BCS341 60LED RGBWW 24V OC L50 5PX	7.5	911401779262
BCS341 60LED RGBNW 24V OC L50 5PX	7.5	911401779272
BCS341 60LED 27K 24V OC L100 10PX	15	911401779102
BCS341 60LED 27K 24V OC L100	15	911401779112
BCS341 60LED 30K 24V OC L100 10PX	15	911401779122
BCS341 60LED 30K 24V OC L100	15	911401779132
BCS341 60LED 40K 24V OC L100 10PX	15	911401779142
BCS341 60LED 40K 24V OC L100	15	911401779152
BCS341 60LED RGB 24V OC L100 10PX	15	911401779162
BCS341 120LED RGBWW 24V OC L100 10PX	15	911401779172
BCS341 120LED RGBNW 24V OC L100 10PX	15	911401779182
BCS342 120LED 27K 24V OC L100 10PX	24	911401703903
BCS342 120LED 27K 24V OC L100 DMX	24	911401703913
BCS342 120LED 27K 24V OC L100	24	911401703923
BCS342 120LED 30K 24V OC L100 10PX	24	911401703933
BCS342 120LED 30K 24V OC L100 DMX	24	911401703943
BCS342 120LED 30K 24V OC L100	24	911401703953
BCS342 120LED 40K 24V OC L100 10PX	24	911401703963
BCS342 120LED 40K 24V OC L100 DMX	24	911401703973
BCS342 120LED 40K 24V OC L100	24	911401703983
BCS342 120LED RGB 24V OC L100 10PX	24	911401703993
BCS342 120LED RGB 24V OC L100 DMX	24	911401704003
BCS342 120LED RGBWW 24V OC L100 10PX	24	911401704013
BCS342 120LED RGBWW 24V OC L100 DMX	24	911401704023
BCS342 120LED RGBNW 24V OC L100 10PX	24	911401704033
BCS342 120LED RGBNW 24V OC L100 DMX	24	911401704043
BCS342 60LED 27K 24V OC L50 5PX	12	911401704053
BCS342 60LED 27K 24V OC L50 DMX	12	911401704063
BCS342 60LED 27K 24V OC L50	12	911401704073
BCS342 60LED 30K 24V OC L50 5PX	12	911401704083
BCS342 60LED 30K 24V OC L50 DMX	12	911401704093
BCS342 60LED 30K 24V OC L50	12	911401704103
BCS342 60LED 40K 24V OC L50 5PX	12	911401704113
BCS342 60LED 40K 24V OC L50 DMX	12	911401704123
BCS342 60LED 40K 24V OC L50	12	911401704133
BCS342 60LED RGB 24V OC L50 5PX	12	911401704143
BCS342 60LED RGB 24V OC L50 DMX	12	911401704153
BCS342 60LED RGBWW 24V OC L50 5PX	12	911401704163

产品型号	功率(W)	12NC
BCS342 60LED RGBWW 24V OC L50 DMX	12	911401704173
BCS342 60LED RGBNW 24V OC L50 5PX	12	911401704183
BCS342 60LED RGBNW 24V OC L50 DMX	12	911401704193
BCS342 36LED 27K 24V OC L30 3PX	7.5	911401704203
BCS342 36LED 27K 24V OC L30 DMX	7.5	911401704213
BCS342 36LED 27K 24V OC L30	7.5	911401704223
BCS342 36LED 30K 24V OC L30 3PX	7.5	911401704233
BCS342 36LED 30K 24V OC L30 DMX	7.5	911401704243
BCS342 36LED 30K 24V OC L30	7.5	911401704253
BCS342 36LED 40K 24V OC L30 3PX	7.5	911401704263
BCS342 36LED 40K 24V OC L30 DMX	7.5	911401704273
BCS342 36LED 40K 24V OC L30	7.5	911401704283
BCS342 36LED RGB 24V OC L30 3PX	7.5	911401704293
BCS342 36LED RGB 24V OC L30 DMX	7.5	911401704303
BCS342 36LED RGBWW 24V OC L30 3PX	7.5	911401704313
BCS342 36LED RGBWW 24V OC L30 DMX	7.5	911401704323
BCS342 36LED RGBNW 24V OC L30 3PX	7.5	911401704333
BCS342 36LED RGBNW 24V OC L30 DMX	7.5	911401704343
<b>附件型号</b>		<b>12NC</b>
ZXP399 Lead 2P DC cable 2m (10 pcs)		911401742382
ZXP399 Jump 2P DC cable 2m (10 pcs)		911401742392
ZXP399 Lead 5P DC/DMX cable 2m (10 pcs)		911401742352
ZXP399 Jump 5P DC/DMX cable 2m (10 pcs)		911401742362
ZXP399 Y-connect kit 5P DC/DMX (10 pcs)		911401742372
ZXP399 Jump 5P DMX connector (10 pcs)		911401756602
ZXP399 endcap male connector (20 pcs)		911401742402
ZXP399 endcap female connector (20 pcs)		911401742412



Y-connector kit 5P DC/DMX



Leader cable 2P DC 2m



Jumper cable 2P DC 2m




Leader cable 5P DC/DMX 2m



Jumper cable 5P DC/DMX 2m



End cap for male connectors



End cap for female connectors

联系人：王建良

联系电话：131 0209 6511

企业网址：www.bokinglighting.com